

# **Videosec<sup>®</sup>**




**RF-CY01-220**

**2Ch RF Roller Shutter Remote Switch**

This product uses ivory white color as the shell, giving a kind of warm and simple sense, the shell is hard and durable, AC voltage input, used in positive and negative rotation motor, motor circuit control, such as Dapeng roller shutter, various Lifting equipment, lifting equipment, industrial signal control, etc.

**Features:**

- Adopt 10A high power relay
- Super heterodyne high sensitivity receiver module
- Regular layout, clear thinking
- Partial grooving, good heat dissipation, more stable performance

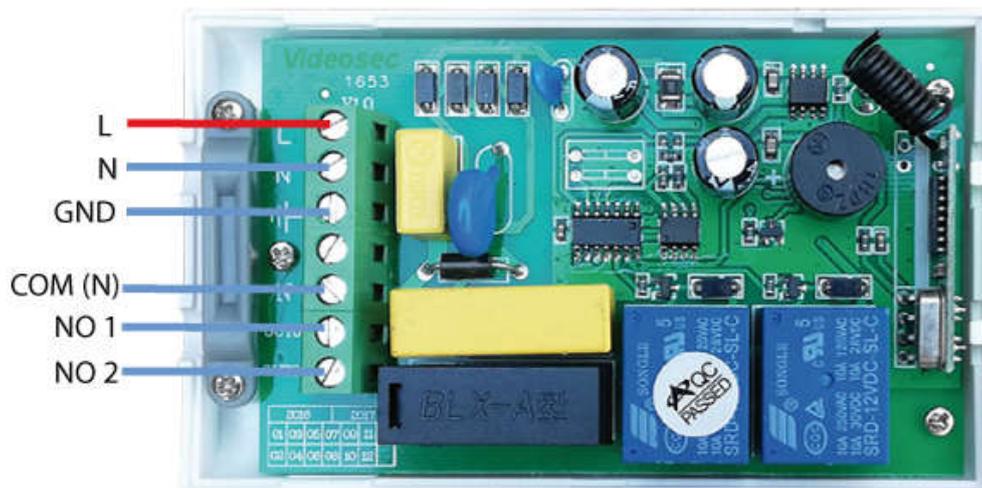


**Learning:**

You don't need to learn the transmitter, because it already pairing in factory.

**Attention!**

You must to insert complex protection on your curtain system, because you can switch on both output on same time! In this case without any protection your curtain motor will damage.

## Wiring diagram

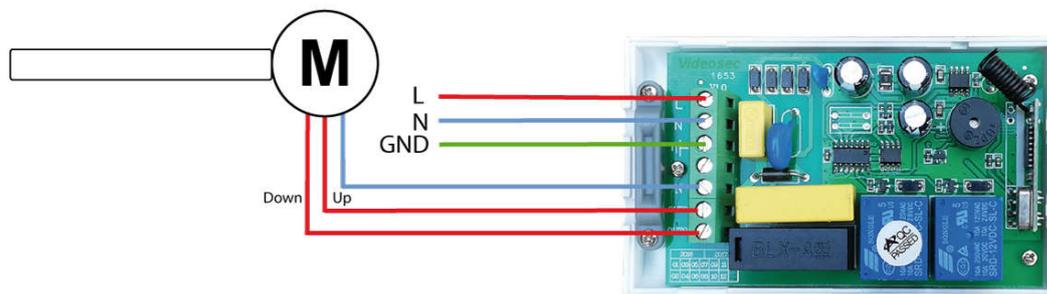

## Specifications:

- Operating Frequency: 433.92MHz  $\pm$ 0.2MHz
- Size: 100x60x32mm, 0,2kg
- Power Supply: 220-240VAC
- Output Relay: 2x Output Relays: NO/COM, 12~240VAC/10A,  $\leq$  1500W
- Receiver Sensitivity:  $\geq$  -105dB
- Decoder chip :(PT2262/PT2264/SC2262) and learning code (EV1527)