


4MP Hybrid Light Fixed Eyeball Network Camera

IPD-3614SA-28DL

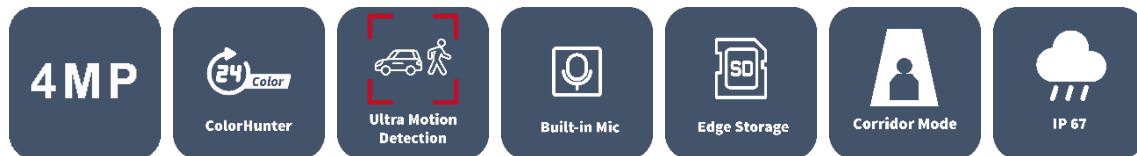

Features

- High quality image with 4MP, 1/3"CMOS sensor
- 4MP (2560*1440)@ 25/20fps; 3MP (2304*1296) @30/25fps; 2MP (1920*1080) @30/25fps
- Ultra 265, H.265, H.264, MJPEG
- Support 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 30m IR distance
- Warm Light, up to 30m warm light distance
- 2D/3D DNR (Digital Noise Reduction)
- Support 512 GB Micro SD card
- IP67 protection
- Support PoE power supply
- 3-Axis


Specifications

IPD-3614SA-28DL					
Camera					
Max Resolution	4MP				
Sensor	1/3.0" CMOS				
Min. Illumination	Colour: 0.008 lux (F1.6, AGC ON) 0 lux with IR				
Day/Night	IR-cut filter with auto switch (ICR)				
Shutter	Auto/Manual, 1 ~ 1/100000s				
Adjustment Angle	Pan: 0° ~ 360°, Tilt: 0° ~ 80°, Rotate: 0° ~ 360°				
S/N	>52dB				
WDR	DWDR				
Lens					
Focal Length	2.8 mm				
Iris	Fixed / F1.6				
Field of View (H)	97.0°				
Field of View (V)	52.2°				
Field of View (D)	107.5°				
DORI					
DORI Distance	Lens (mm)	Detect(m)	Observe(m)	Recognize(m)	Identify(m)
	2.8	63	25.2	12.6	6.3
Illuminator					
Supplemental Light	Dual Light				
Illumination Distance(IR)	30 m				
Illumination Distance(Warm Light)	30 m				
Wavelength (IR)	850 nm				
IR On/Off Control	Auto/Manual				
Video					
Video Compression	Ultra 265; H.265; H.264; MJPEG				
H.264 Code Profile	Baseline profile, Main profile, High profile				
Video Stream	Dual Streams				
Frame Rate	Main Stream: 4MP (2560*1440), Max 25fps; 3MP (2304*1296), Max 30fps; 1080P (1920*1080), Max 30fps; 720P (1280*720), Max 30fps Sub Stream: D1 (720*576), Max 30fps; 640*360, Max 30fps; 2CIF (704*288), Max 30fps; CIF (352*288), Max 30fps;				
Video Bit Rate	128 Kbps ~ 6144 Kbps				
OSD	Up to 4 OSDs				
Privacy Mask	Up to 4 areas				
ROI	Up to 8 areas				
Image					

White Balance	Auto; Outdoor; Fine Tune; Sodium Lamp; Locked; Auto2
Digital Noise Reduction	2D/3D DNR
Smart IR	Support
Flip	Normal; Flip Vertical; Flip Horizontal; 180°; 90°Clockwise; 90°Anti-clockwise
HLC	Support
BLC	Support
Defog	Digital Defog
Events	
Basic Detection	Motion Detection; Ultra Motion Detection; Tampering Alarm; Audio Detection
General Function	Watermark; IP Address Filtering; Access Policy; ARP Protection; RTSP Authentication; User Authentication; HTTP Authentication
Audio	
Audio Compression	G.711U; G.711A
Audio Bitrate	64 kbps
Suppression	Support
Sampling Rate	8kHz
Storage	
Edge Storage	Micro SD, up to 512 GB
Network Storage	ANR; NAS (NFS)
Network	
Protocols	IPv4; IGMP; ICMP; ARP; TCP; UDP; DHCP; RTP; RTSP; RTCP; RTMP; DNS; DDNS; NTP; FTP; UPnP; HTTP; HTTPS; SMTP; QoS; SSL/TLS; SNMP
Compatible Integration	ONVIF (Profile S, Profile G, Profile T); API; SDK
User/Host	Up to 32 users, 2 user levels: administrator and common user
Security	Password Protection; Strong Password; HTTPS Encryption; Export Operation Logs; Basic and Digest Authentication for RTSP; Digest Authentication for HTTP; TLS 1.2; WSSE and Digest Authentication for ONVIF
Client	Guard Live; Guard Live Pro; Guard Station
Web Browser	Plug-in required live view: IE 10 and above, Chrome 45 and above, Firefox 52 and above, Edge 79 and above; Plug-in free live view: Chrome 57.0 and above, Firefox 58.0 and above, Edge 16 and above
Interface	
Built-in Mic	Support
Network	1 x RJ45 10M/100M Base-TX Ethernet
Certification	
EMC	CE-EMC (EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 50130) FCC (FCC 47 CFR part15 B)
Safety	CE LVD (EN 62368-1) UL/CUL (UL 62368-1, CAN/CSA C22.2 No. 62368-1)
Environment	CE-RoHS (2011/65/EU;(EU)2015/863); WEEE (2012/19/EU);
Protection	IP67 (IEC 60529)

General	
Power	DC 12V ± 25%, PoE (IEEE 802.3af) Power consumption: Max 8W
Power Interface	Ø 5.5mm coaxial power plug
Dimensions	Ø 111 x 95mm
Weight	0.29kg
Material	Metal + Plastic
Working Environment	-30 °C ~ 60 °C, Humidity: ≤95% RH (non-condensing)
Storage Environment	-30 °C ~ 60 °C, Humidity: ≤95% RH (non-condensing)
Surge Protection	4kV

Dimensions

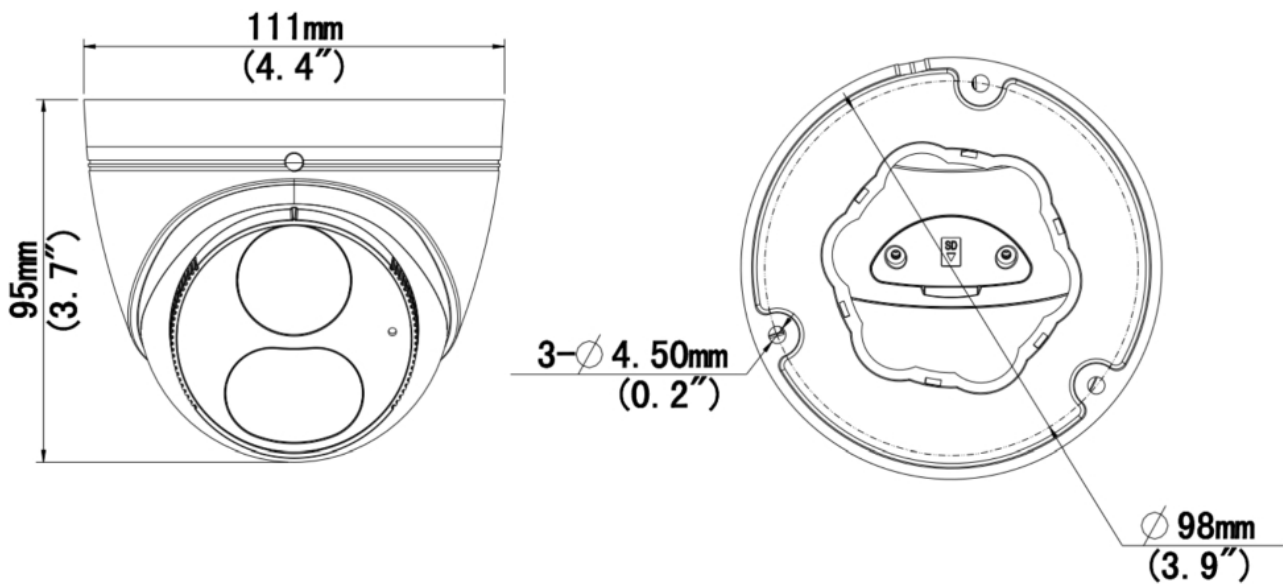

Accessories

TR-JB03-G-IN	TR-WM03-D-IN	TR-UP06-IN	TR-A01-IN
junction box	wall mounting bracket	pole mounting bracket	
			
	TR-SE24-A-IN	TR-CM24-IN	
	Dome Pendant Mounting Pole 500mm	Dome Pendant Mounting Bracket	
			