


Desktop switch

PS08FE+2FE-V2

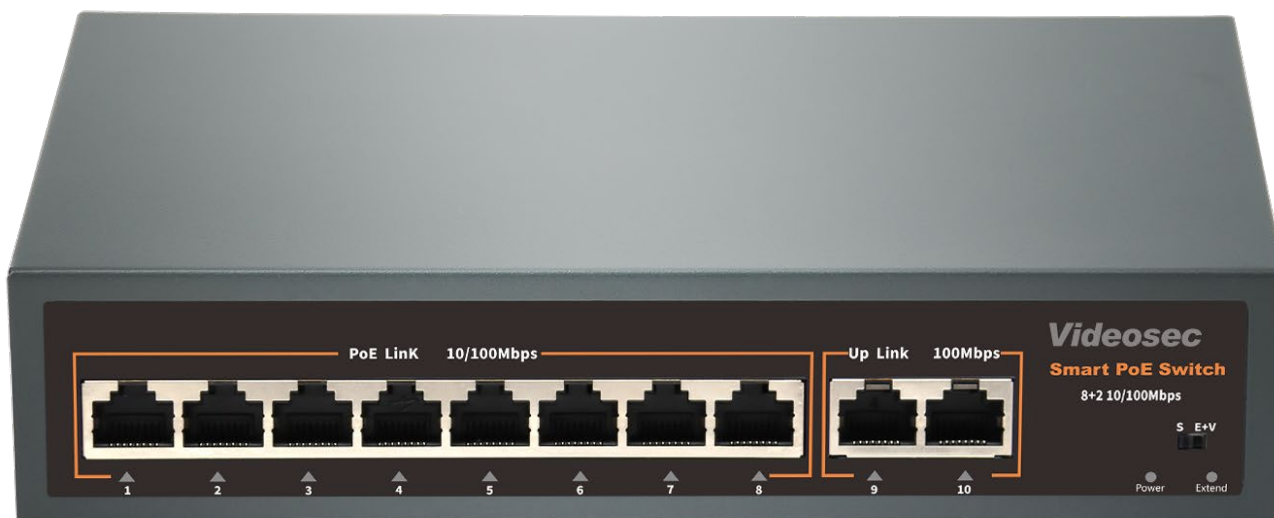

Key Features

- 8*10/100Mbps PoE port; 2*10/100Mbps Up Link port
- 250m Distance VLAN Support
- Support IEEE802.3af/at
- Whole Power:120W (52V 2.3A)
- All port supported by MDI/MDIX auto flip and self-negotiation
- Supply 8 10/100Mbps adaptive high speed forwarding data packet non-lost port.
- Support IEEE802.3x flow control for Full-duplex mode and backpressure for Half-duplex mode.
- Each port max. power supply reached 30W

Specifications

| | |
|---------------------|------------------------------------------------------------------------------|
| Model | PS08FE+2FE-V2 |
| Product | 8+2 Port 250m PoE Switch (Built-in) |
| PoE Port | 1 to 8 support IEEE802.3af/at Standard |
| Output Power | 15.4W/30W IEEE802.3af/at |
| Power Pin | Both 1/2+, 3/6- and 4/5+7/8- |
| Whole Power | ≤120W (52V 2.3A) |
| PoE Protocol | IEEE 802.3af/IEEE 802.3at |
| PoE Type | End-span |
| Power Distance | ≤250m |
| Network Standard | IEEE 802.3, IEEE802.3u, 802.3x, 802.3af/at |
| Network Medium | 10/100/1000BASE-TX:5 class and above non shielded twisted pair |
| Data Distance | ≤250m |
| Switch Capability | 1.6Gbps |
| Forwarding Mode | Store and forward |
| Forwarding Rate | 10BASE-tx:14880pps/port |
| | 100BASE-tx: 148800pps/port |
| MAC Address | MAC address table 2K |
| Port Function | Power priority mechanism, fast and forward, MAC automatic learning and aging |
| | IEEE802.3X Full-duplex and mode and backpressure for Half-duplex mode |
| LED Indicator | LINK/ACT. 100Mbps; PoE Status Indicator; Power indicator; Extender indicator |
| Working Environment | Working temperature: -10°-- 55°C |
| Power | 230VAC/125W (internal power supply) |
| Weight | 950g |
| Size | 200×118×44mm(L*W*H) |