


## Desktop switch

PS08GE+2GE+2SFP

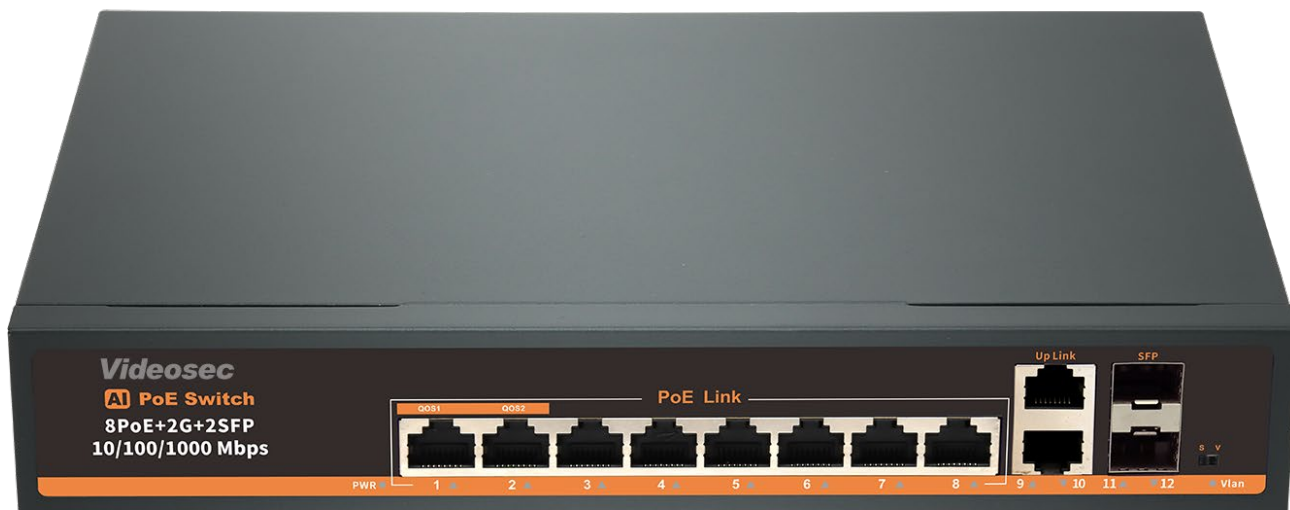

## Key Features

- 8\*100/1000Mbps PoE port, 2\*100/1000Mbps Up Link, 2\*100/1000Mbps SFP
- 100m Distance
- VLAN function
- Support IEEE802.3af/at
- Whole Power:120W (52V 2.3A)
- All port supported by MDI/MDIX auto flip and self-negotiation
- Supply 10\*10/100/1000Mbps adaptive high speed forwarding data packet non-lost port.
- Support IEEE802.3x flow control for Full-duplex mode and backpressure for Half-duplex mode
- Each port max. power supply reached 30W

## Specifications

Model	PS08GE+2GE+2SFP
Product	8+2+1 Port full Gigabit PoE Switch (Built-in)
PoE Port	1 to 8 support IEEE802.3af/at standard
Output Power	15.4W/30W IEEE802.3af/at
Power Pin	Both 1/2+, 3/6- and 4/5+7/8
Whole Power	≤120W (52V 2.3A)
PoE Type	End-span
Power Distance	≤100m
Network Standard	IEEE 802.1s, IEEE 802.1Q, IEEE 802.1p, IEEE 802.3x, IEEE802.3af, IEEE802.3at
Network Medium	100/1000BASE-TX: 5 class and above non shielded twisted pair
Data Distance	≤100m
Switch Capability	12Gbps
Forwarding Mode	Store and forward
Forwarding Rate	10BASE-tx:14880pps/port
	100BASE-tx: 148800pps/port
	1000BASE-tx: 1488000pps/port
MAC Address	MAC address table 2K
Port Function	Power priority mechanism, fast and forward, MAC automatic learning and aging
	IEEE802.3X Full-duplex and mode and backpressure for Half-duplex mode
LED Indicator	Each port occupied 1 LINK/ACT. 100Mbps
	PoE Status Indicator, Whole power indicator
Working Environment	Working temperature: -10°-- 55°C
Input	230VAC, 50Hz
Weight	1.5kg
Size	270×180×44mm(L×W×H)