

## XVR-301-04H



### Key Features

- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920\*1080
- Long transmission distance over coaxial cable


### Specifications

Model	XVR-301-04H
Video/Audio Input	
Analog Video Input	4-ch, BNC
IP Video Input	2-ch(only IP up to 6ch), each channel up to 4K
Supported Analog Camera Types	<p><b>Support AHD input:</b></p> <p>8MP@15fps(channel1)                      5MP@20fps                      4MP@30fps                      3MP@30fps(channel1)                      1080P@30fps                      720P@60fps</p> <p><b>Support TVI input:</b></p> <p>8MP@15fps(channel1)                      5MP@20fps                      4MP@30fps                      3MP@20fps (channel1)                      1080P@30fps</p>

	720P@60fps <b>Support CVI input:</b> 8MP@15fps(channel1) 5MP@20fps 4MP@30fps 1080P@30fps 720P@30fps <b>Support CVBS input</b>
Audio Input	1-ch, RCA
Two-way Audio	1-ch, RCA
<b>Network</b>	
Incoming Bandwidth	48Mbps
Outgoing Bandwidth	60Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
<b>Video/Audio Output</b>	
CVBS Output	1-ch, BNC
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Audio Output	1-ch, RCA
Synchronous Playback	4-ch
<b>Encoding</b>	
Recording Resolution	8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
Recording Frame Rate	<b>Main stream:</b> 8MP Lite@8fps(channel1) 5MP Lite@12fps 4MP Lite@15fps 3MP@15fps(channel1) 2MP@15fps 720P@30fps <b>Sub stream:</b> D1@30fps(Max)
<b>Hard Disk</b>	
SATA	1 SATA interface

Capacity	Up to 10TB for each HDD
<b>External Interface</b>	
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
Serial Interface	1 x RS485
<b>General</b>	
Power Supply	12V DC Power Consumption: ≤ 8 W( without HDD )
Working Environment	-10°C ~ + 55°C, Humidity ≤ 90% RH(non-condensing)
Dimensions(W×D×H)	260mm ×240mm× 46mm
Weight ( without HDD )	≤1.1 Kg

## Dimensions

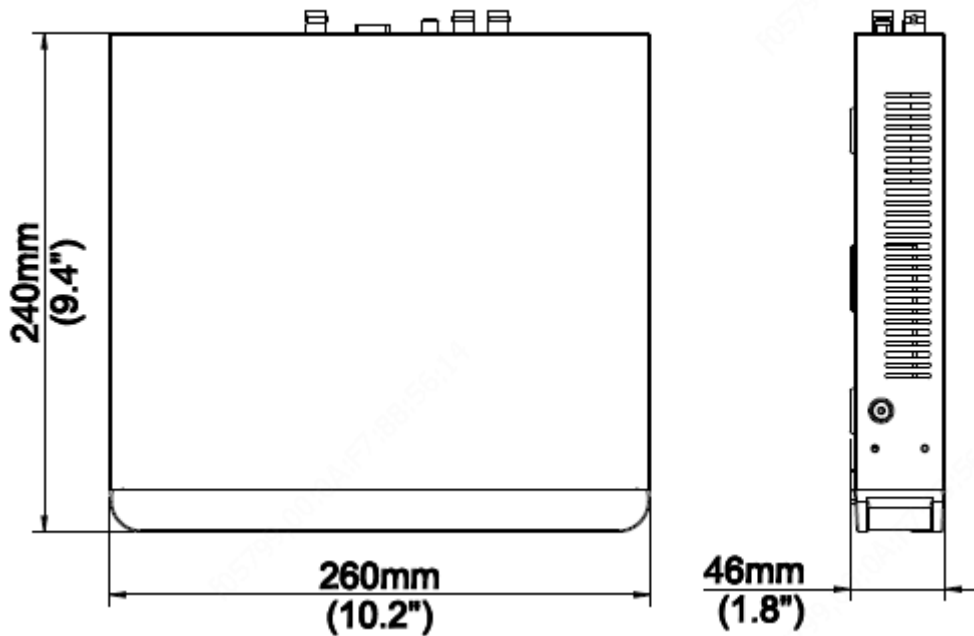

## Rear Panel

