

### XVR-301-04Q+2/08Q+4



### Key Features

- Support H.265/H.264 video formats
- Support audio over coaxial cable (only for TVI cameras)
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4/8-channel BNC input
- Support 1-ch VGA output, 1-ch HDMI output at up to 4K (3840 x 2160)
- HDMI and VGA simultaneous output
- Long transmission distance over coaxial cable
- Support mainstream cameras of ONVIF and RTSP protocols


## Specifications

Model	XVR-301-04Q+2	XVR-301-08Q+4
Video/Audio Input		
Analog Video Input	4-ch, BNC	8-ch, BNC
IP Video Input	2-ch (only IP up to 6ch), each channel up to 4MP	4-ch (only IP up to 12ch), each channel up to 4K
Supported Analog Camera Types	<b>Support AHD input:</b> 8MP@15fps 5MP@20fps 4MP@30fps 1080P@30fps 720P@30fps <b>Support TVI input:</b> 8MP@15fps 5MP@20fps 4MP@30fps 1080P@30fps 720P@30fps <b>Support CVI input:</b> 8MP@15fps 5MP@25fps 4MP@30fps 1080P@30fps 720P@30fps <b>Support CVBS input</b>	<b>Support AHD input:</b> 8MP@15fps 5MP@20fps 4MP@30fps 1080P@30fps 720P@30fps <b>Support TVI input:</b> 8MP@15fps 5MP@20fps 4MP@30fps 1080P@30fps 720P@30fps <b>Support CVI input:</b> 8MP@15fps 5MP@25fps 4MP@30fps 1080P@30fps 720P@30fps <b>Support CVBS input</b>
Audio Input	1-ch, RCA	
Audio Compression	G.711U	
Video/Audio Output		
CVBS Output	1-ch, BNC	
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
HDMI Output	3840 x 2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
Audio Output	1-ch, RCA	
Synchronous Playback	SD: 4 HD: 6	SD: 8 HD: 12
Live view display	HDMI/VGA: 1/4/6/8/9	HDMI/VGA: 1/4/6/8/9/16
Two-way	1-ch, RCA	

Audio				
<b>Network</b>				
Incoming Bandwidth	40Mbps (Up to 48Mbps after all analog channel conversion)		40Mbps (Up to 56Mbps after all analog channel conversion)	
Outgoing Bandwidth	48Mbps		64Mbps	
Remote Users	128			
Protocols	TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP			
Browser	IE(IE10/11) for Windows Firefox (version 52.0 and above) for Windows Chrome (version 45 and above) for Windows Edge (version 79 and above) for Windows			
<b>Encoding</b>				
Recording Resolution	8MP Lite/5MP/5MP Lite/4MP Lite/1080P/720P/CIF		8MP Lite/5MP/5MP Lite/4MP Lite /1080P/720P/CIF	
Recording Frame Rate	<b>Main stream</b>	<b>Sub stream</b>	<b>Main stream</b>	<b>Sub stream</b>
	8MP Lite@8fps	D1@8fps	8MP Lite@8fps	D1@8fps
	5MP@6fps (Only for 5MP @12.5 access)	D1@6fps	5MP@6fps (Only for 5MP @12.5 access)	D1@6fps
	5MP Lite @12fps	D1@12fps	5MP Lite @12fps	D1@12fps
	4MP Lite@15fps	D1@15fps	4MP Lite@15fps	D1@15fps
	1080P@15fps	D1@15fps	1080P@15fps	D1@15fps
	720p@30fps	D1@30fps	720p@30fps	D1@30fps
Audio Sample Rate	8KHz,16 bit per channel			
Audio Bit Rate	64Kbps per channel			
<b>Decoding</b>				
Capability	Analog: 4 x 8MP Lite@8, 4x 5MP Lite@12, 4x 4MP Lite@15, 4 x 1080P@15 IP: 1 x 4MP@30, 2 x 1080P@30		Analog: 8 x 8MP Lite@8, 8x 5MP Lite@12, 8x 4MP Lite@15, 8x 1080P@15 IP: 1 x 4K@30, 2 x 4MP@30, 4 x 1080P@30	
<b>Hard Disk</b>				
SATA	1 SATA interface			
Capacity	Up to 8TB for each HDD (The maximum HDD capacity varies with environment temperature)			
<b>General Alarm</b>				
General Alarm	Motion detection			
Alert Alarm	IP Conflict, Network Disconnected, Disk offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal			
<b>External Interface</b>				

Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
RS485	1
Alarm In	4-ch
Alarm Out	1-ch
<b>General</b>	
Power Supply	12V DC Power Consumption: ≤ 10 W (without HDD)
Working Environment	-10°C ~ + 55°C, Humidity ≤ 90% RH (non-condensing)
Dimensions(W×D×H)	260mm ×226mm× 47mm
Weight (without HDD)	≤1.1 Kg
<b>Certification</b>	
Certification	UL /CE /FCC /RoHS /WEEE

## Dimensions

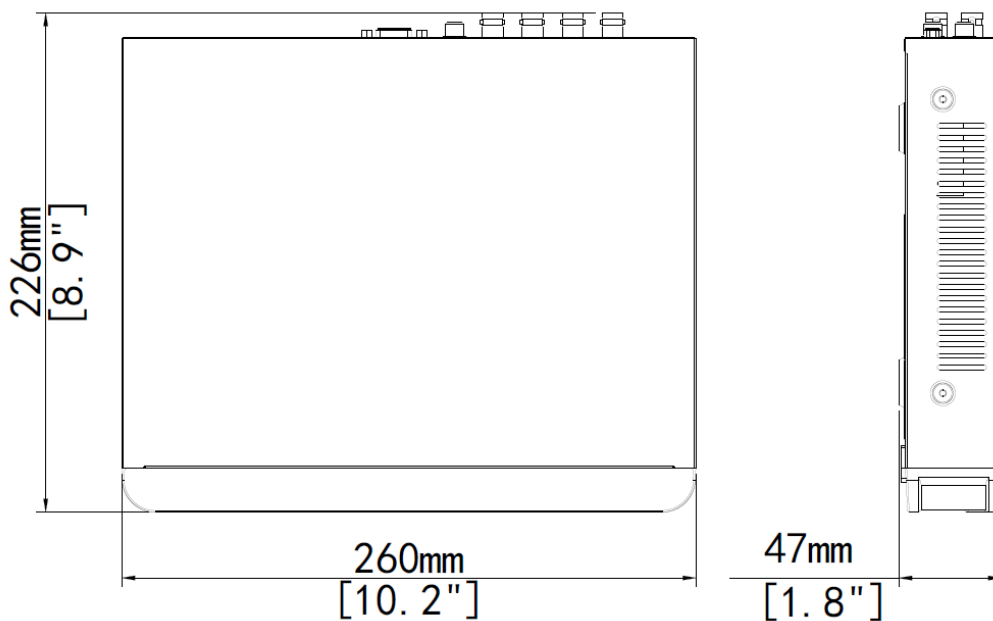

## Rear Panel

Take XVR-301-08Q+4 for example

