

XVR-301-16Q+8



Features

- Support Ultra 265/H.265/H.264 video formats
- Support audio over coaxial cable (only for TVI cameras)
- Control the dual-light of UNV analog cameras under TVI
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 16-channel BNC input
- Support 1-ch CVBS output, 1-ch VGA output, 1-ch HDMI output at up to 4K (3840 x 2160)
- HDMI and VGA simultaneous output
- Long transmission distance over coaxial cable
- Support mainstream cameras of ONVIF and RTSP protocols


Specifications

Model	XVR-301-16Q+8
Video/Audio Input	
IP Video Input	8-ch
Analog Video Input	16-ch, BNC
Max IP Video Input	24-ch
Supported Analog Camera Types	Support AHD input: 8MP@15fps 5MP@20fps 4MP@30fps 1080P@30fps 720P@30fps Support TVI input: 8MP@15fps 5MP@20fps 4MP@30fps 1080P@30fps 720P@30fps Support CVI input: 8MP@15fps 5MP@25fps 4MP@30fps 1080P@30fps 720P@30fps Support CVBS input
BNC Audio Input	16-ch, channel audio (BNC, over coaxial camera, only with Videosec cameras in TVI mode)
RCA Audio Input	1-ch
Video/Audio Output	
HDMI Output	HDMI: 4K (3840 × 2160)/30 Hz, 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
VGA Output	VGA: 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
BNC Video Output	1-ch
RCA Audio Output	1-ch
Live View Display	HDMI/VGA: 1/4/6/8/9/25
Playback Screen	1/4/9/16
Encoding/Decoding	
Recording Resolution	8MP Lite/5MP Lite/4MP Lite/1080P/720P/D1
Recording Frame Rate	Main stream: 8MP Lite@8fps Sub stream: D1@8fps Main stream: 5MP Lite@12fps Sub stream: D1@12fps Main stream: 4MP Lite@15fps Sub stream: D1@15fps

	Main stream: 1080P@15fps Sub stream: D1@12fps Main stream: 720P@30fps Sub stream: D1@12fps
Audio Sample Rate	8 kHz, 16 bit per channel
Audio Bit Rate	64 kbps per channel
Decoding Capability	Analog: 16 x 8MP Lite@8 fps, 16 x 5MP Lite@12fps, 16 x 4MP Lite@15 fps, 16 x 1080P@15 fps, 16 x 720P@30 fps IP: 2 x 8MP@30 fps, 3 x 5MP@30 fps, 4 x 4MP@30 fps, 8 x 1080P@30 fps, 16 x 720P@30 fps, 24 x D1@30 fps
Num of Concurrent Playback in Local	16-ch
Two-way Audio	
Two-way Audio	1-ch, RCA (Using the audio input and output)
Analog Snapshot	
FTP/Schedule/Event Snapshot	Schedule/FTP/Event snapshot:16-ch snapshot, up to 704x576 resolution
Network	
Incoming Bandwidth	80Mbps (Up to 112 Mbps after all analog channel conversion)
Outgoing Bandwidth	160Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP
Browser (Plugin)	IE10, IE11, Chrome 45+, Edge 79+, Firefox 52+
Smart	
Analog Smart by XVR	IQ Motion Detection (IQM), SIP (Intrusion Detection, Cross Line Detection, Enter Area, Leave Area), Face Detection
Smart Functions by XVR	16-ch (IQM), 4-ch (SIP), 2-ch (Face Detection)
IP Smart by IPC	Face Detection, SIP (Intrusion Detection, Cross Line Detection, Enter Area, Leave Area), Defocus Detection, Object Removed, Object Left Behind, Auto Tracking
Smart Functions by IP Camera	4-ch (SIP)
VCA Search	Face Search, Behavior Search
Alarm	
General Alarm	Motion
Alert Alarm	IP Conflict, Network Disconnected, Disk offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal
GUI Language	
GUI Language	English, Hungarian, Slovak, Croatian, Serbia, Romanian, Italian, Slovenia
Hard Disk	
SATA	1 SATA interface
Capacity	Up to 16 TB for each HDD (The maximum HDD capacity varies with environment temperature)
External Interface	
Network Interface	1 RJ45 10 M/100 M/1000 M self-adaptive Ethernet Interface
USB	Rear panel: 1 × USB2.0, 1 × USB3.0
RS-485	1
Alarm In	4-ch

Alarm Out	1-ch
Working Environment	
Power Supply	DC 12 V/3 A
Power Consumption (without HDD)	≤ 15W
Working Temperature	-10 °C to 55 °C
Working Humidity	≤ 90% RH (non-condensing)
Weight (without HDD)	≤1.1 kg
Dimensions	260mm ×240mm× 46mm
Certification	
Certification	CE, FCC, UL, RoHS, WEEE
CE	EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035
FCC	Part15 Subpart B

Dimensions

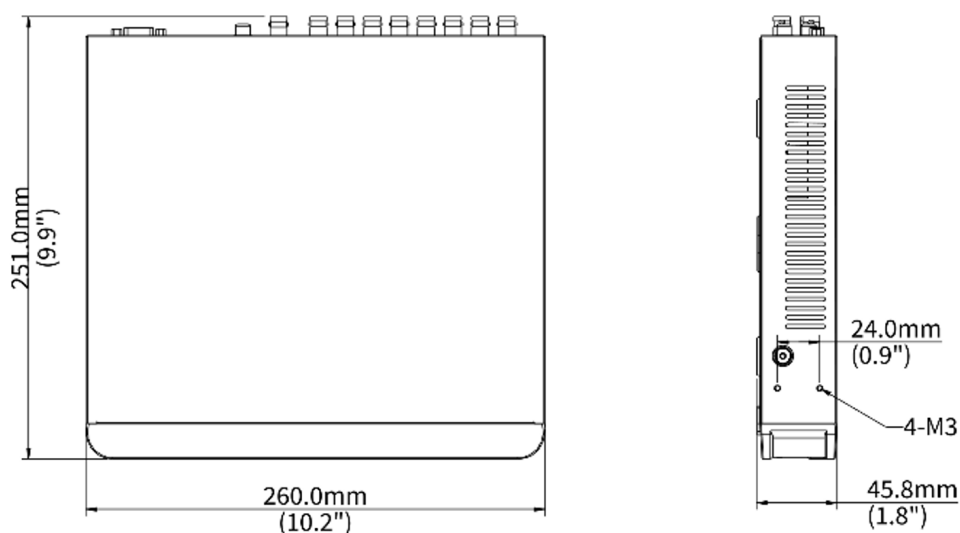

Accessories

RM-1U-260

1 HDD 1U NVR Rack Mount



Rear Panel

