




XVR-4116

5in1 pentabrid AHD, TVI, CVI, CVBS + IP Video Recorder

- Support 16ch 1080N unreal-time encoding;
- Support AHD, TVI, CVI, CVBS, IP video input;
- HDMI/VGA simultaneous video output;
- Mini 1U Case, 1 SATA(Up to 6TB);
- 1*10/100Mbps auto-sensing Ethernet port, RJ45 port
- Automatic networking support, a key to add equipment;
- Support Onvif protocol;
- Cloud services, P2P, alarm information push to phone;
- Support remote access, support ARSP;
- Support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, 3G, WIFI, IP search, Alarm center, etc ;
- Mobile phone remote monitoring (iOS, Android);
- Support for more than twenty languages;
- Perfect protection circuit, unique triple watchdog function
- Support WEB, VMS, XMEYE Platform;

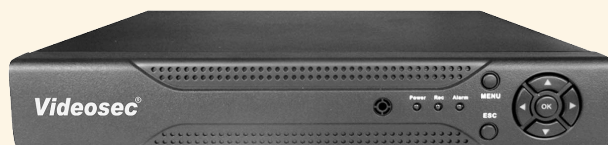

Specifications

Video Input	16 x BNC (Support Coaxitron)
Audio Input	6-ch, RCA
HDMI Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Audio Output	1-ch, RCA
Recording Resolution	16 x 1080N@12fps(4in1) 16 x 720P(4in1)
Multi mode	Hybird: 8 x 1080N-max (analog) + 8 x 720p-max (network)
NVR / IP-only mode	IP: 16 x 720p
Synchronous Playback	16-ch / 1080N
Compression	H.264
Storage Interface	1 SATA interface - internal
Capacity	up to 6TB
Record Mode	Manual>Alarm>Motion detection>Timing
Inquire mode	Inquire by Time/Calendar/Event/Channel
Storage mode	HDD Storage, Network Storage
Backup	Network, USB, SATA
Network Interface	1*10/100Mbps Ethernet port, RJ45 port
PTZ Control	1*RS485, Support for multiple PTZ protocol
USB Interface	2 x USB2.0 ports
CPU	Hi3521D
Alarm I/O	0 / 0
Power Supply	12V/2A
Consumption (without HDD)	≤ 10 W
Working Temperature	0°C ~ + 55°C
Working Humidity	10% -90% RH
Dimensions / Weight (W/O HDD)	255mm(L) x 236mm(W) x 44mm(H) / 1kg