




IPD-3614-28MC

4MP Fixed Dome Network PoE Camera

- 3D DNR (Digital Noise Reduction)
- Up to 120 dB WDR (Wide Dynamic Range)
- Smart IR, up to 30 m IR distance
- H.265, H.264, MJPEG triple stream + Smart Encode
- Embedded smart algorithm
- 9:16 corridor format
- ONVIF Conformance
- Wide temperature range: -35°C to 60°C
- Wide voltage range of $\pm 25\%$
- 4 KV surge protection designed for network interface
- IP67
- Junction Box: JB03-C-IN

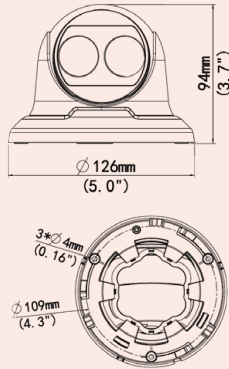

Specifications

Sensor	1/3", 4 megapixel, progressive scan, CMOS
Shutter	Auto/Manual, 1/6~1/100000 s
Lens	2.8mm@F1.8, Angle of view(H): 101.8°
Adjustment Range	Pan: 0° ~360°, Tilt: 0° ~ 90°, Rotation: 0° ~ 360°
Min. Illumination	Colour: 0.02 Lux (F1.8, AGC ON), 0 Lux with IR
Day/Night	IR-cut filter with auto switch (ICR)
IR Range	Up to 30m IR range
AWB (Auto white balance)	auto/manual
Gain Control	auto/manual
Noise Reduction	2D/3D
WDR	120 dB
Max. Resolution	2592×1520
Video Compression	H.265 + Smart Encode, H.264, MJPEG
Frame rate	4MP (2592×1520): Max. 20 fps; 4MP (2560×1440): Max. 25 fps; 3MP (2048×1520): Max. 30 fps; 1080P (1920×1080): Max. 30 fps
9:16 Corridor Mode / ROI	Supported / Supported
Video Streaming	Triple
OSD	Up to 8 OSDs
Privacy Mask	Up to 8 areas
Behavior Detection	Intrusion, crossing line, Defocus, Scene Change, motion detection (22x18 grid / 4 area)
Intelligent Identification	Face detection
Statistical Analysis	People counting
General functions	Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication
Protocols	L2TP, IPv4, IPv6, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SIP, STUN, 802.1x, (Telnet default: OFF)
Compatible Integration	ONVIF(Profile S), API
Network	1 RJ45 10M/100M Base-TX Ethernet
Power	12 V DC $\pm 25\%$, or PoE (IEEE802.3 af), Power consumption: Max. 5.5 W
Dimensions (Ø x H), Weight	Ø126 x 94 mm, 0.45 kg)
Working Environment	-35°C ~ +60°C, Humidity $\leq 95\%$ RH(non-condensing)
Ingress Protection	IP67